


HI-SHEAR CORPORATION, U.S.A. (Patent Holder)	CAGE No. 73197	BLANC AERO INDUSTRIES RUOBY (Licensee)	CAGE No. U6300
lisi AEROSPACE Company		lisi AEROSPACE Company	
AIR INDUSTRIES CO., INC., U.S.A. (Licensee - U.S.A. & Canada)	CAGE No. 08725	BLANC AERO S.A., France (Licensee)	CAGE No. F0186
ALCOA FASTENING SYSTEMS, U.S.A. (Licensee)	CAGE No. 18663	lisi AEROSPACE Company	
SPS TECHNOLOGIES, U.S.A. (Licensee)	CAGE No. 55675	lisi AEROSPACE CANADA (Licensee)	CAGE No. L4528
WEST COAST AEROSPACE INC., U.S.A. (Licensee)	CAGE No. 00516	lisi AEROSPACE Company	
MINEBEA CO., LTD. Japan (Pins & Steel Collars)	(Licensee-Japan)	FT BESTAS, Izmer (Licensee)	CAGE No. T0802

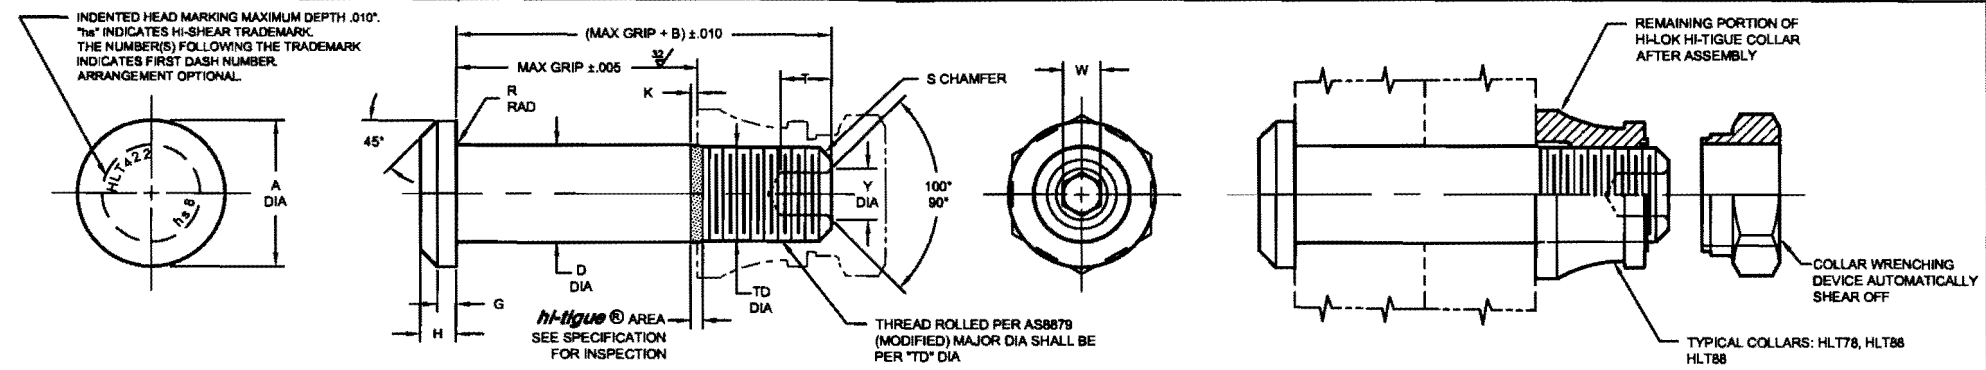

HI-LOK® HI-TIGUE® PIN

HI-LOK® HI-TIGUE® PIN AND COLLAR AFTER ASSEMBLY

FIRST DASH NO.	PIN NOM DIA	A DIA	B REF	D DIA		TD DIA	G REF	H	K REF	R RAD	S CHAMFER REF	THREAD	SOCKET			DOUBLE SHEAR POUNDS MINIMUM	TENSION POUNDS MINIMUM
				WITHOUT PLATING S.F.L. OR COATING	WITH PLATING S.F.L. OR COATING								W HEX	T DEPTH	Y DIA		
5	5/32	.322 .306	.312	.1635 .1630	.1635 .1625	.1595 .1570	.030 .055	.065 .055	.013	.025 .015	1/32" x 45°	8-32UNJF-3A Modified	.0801 .0791	.100 .080	.119 .104	5,280	2,940
6	3/16	.377 .357	.325	.1895 .1890	.1895 .1885	.1840 .1810	.035 .064	.074 .064	.016	.025 .015	1/32" x 45°	10-32UNJF-3A Modified	.0806 .0791	.100 .080	.119 .104	7,060	4,350
8	1/4	.440 .415	.395	.2495 .2490	.2495 .2485	.2440 .2410	.045	.090 .080	.021	.025 .015	1/32" x 45°	1/4-28UNJF-3A Modified	.0967 .0947	.110 .090	.142 .122	12,260	7,750
10	5/16	.505 .475	.500	.3120 .3115	.3120 .3110	.3060 .3020	.055	.112 .102	.026	.030 .020	3/64" x 45°	5/16-24UNJF-3A Modified	.1295 .1270	.130 .110	.180 .160	19,160	12,300
12	3/8	.600 .565	.545	.3745 .3740	.3745 .3735	.3680 .3640	.075	.140 .130	.030	.030 .020	3/64" x 45°	3/8-24UNJF-3A Modified	.1617 .1582	.160 .140	.217 .197	27,600	19,100
14	7/16	.676 .641	.635	.4370 .4365	.4370 .4360	.4310 .4260	.095	.160 .150	.035	.030 .020	3/64" x 45°	7/16-20UNJF-3A Modified	.1930 .1895	.190 .170	.253 .233	37,500	25,800
16	1/2	.770 .735	.685	.4995 .4990	.4995 .4985	.4930 .4880	.095	.188 .178	.039	.030 .020	3/64" x 45°	1/2-20UNJF-3A Modified	.2242 .2207	.220 .200	.289 .269	49,100	34,300
18	9/16	.877 .842	.770	.5615 .5610	.5615 .5605	.5550 .5500	.125	.210 .200	.039	.040 .025	1/16" x 45°	9/16-18UNJF-3A Modified	.2555 .2520	.260 .240	.326 .306	62,100	43,500
20	5/8	.953 .918	.825	.6240 .6235	.6240 .6230	.6180 .6120	.175	.265 .255	.044	.040 .025	1/16" x 45°	5/8-18UNJF-3A Modified	.2555 .2520	.260 .240	.326 .306	76,700	54,600
24	3/4	1.150 1.110	1.050	.7490 .7485	.7490 .7480	.7430 .7370	.200	.335 .320	.044	.045 .030	1/16" x 45°	3/4-16UNJF-3A Modified	.3185 .3150	.330 .300	.398 .378	110,400	79,200

SEE COLLAR STANDARDS FOR COLLAR STRENGTHS. LOWER STRENGTH (PIN OR COLLAR) DETERMINES SYSTEM STRENGTH.

GENERAL NOTES:

1. Concentricity: "A" to "D" diameter within .010 FIM.
2. Dimensions to be met after finish.
3. Surface texture per ANSI B46.1.
4. Hole preparation per NAS618.
5. Evidence of broken edge across points.
6. Use HLT622 for oversize replacement.

MATERIAL:

Nickel base alloy per AMS5662.

HEAT TREAT:

125,000 psi shear minimum (210,000 psi tensile minimum).

FINISH:

- HLT422-() = Passivate per Hi-Shear Spec. 258, and cetyl alcohol lube per Hi-Shear Spec. 305.
- HLT422AP() = Hi-Kote 1 aluminum coating per Hi-Shear Spec. 294, and cetyl alcohol lube per Hi-Shear Spec. 305.
- HLT422DL() = Solid film lube per AS5272, Type I, and cetyl alcohol lube per Hi-Shear Spec. 305.
- HLT422PB() = Cadmium plate per AMS-QQ-P-416, Type II, Class 2, and cetyl alcohol lube per Hi-Shear Spec. 305.
- HLT422SC() = Grit blast top of head, passivate per Hi-Shear Spec. 258, with color green on thread end, and cetyl alcohol lube per Hi-Shear Spec. 305.
- HLT422FB() = Grit blast top of head, passivate per Hi-Shear Spec. 258, and cetyl alcohol lube per Hi-Shear Spec. 305.


SPECIFICATION:

Hi-Lok Hi-Tigue Product Specification 342.

CODE:

First dash number indicates nominal diameter in 1/32nds. Second dash number indicates maximum grip in 1/16ths. See Finish note for explanation of code letters.

HOW TO ORDER EXAMPLE:



DRAWN DATE		TITLE	
D.P.S.	4-22-83	HI-LOK® HI-TIGUE® PIN	
APPROVED DATE		PROTRUDING TENSION HEAD NICKEL BASE ALLOY (INCONEL 718) 1/16" GRIP VARIATION	
R.Ting	4-22-83	DRAWING NUMBER	
REVISION DATE		HLT422	
(16)	J.Obispo 2-29-12		

HLT422